



## CARBIDE ENDMILLS - Long Neck Ball Nose Type - 2F

- UNICO Coating provides superior wear resistance and reduces the coefficient of friction.
- Suitable for HRC 30 to HRC 55 Ordinary Steel, Alloy Steel, Cast Iron, Heat-Resistant Steel, Copper, FRP, etc.
- Reduce vibration and more toughness.
- It provides an excellent surface due to better surface grindings.
- Long neck design is suitable for rid cutting.

### EPBBC2 EPBRC2

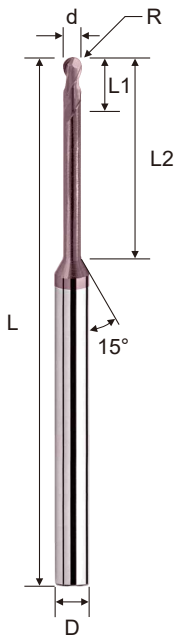

Order No.	Radius (R)	Dia. (d)	CL (L1)	EFF-L (L2)	OAL (L)	Shank (D)	Flutes (F)
EPBBC200301U	0.15R	0.3	0.3	1	50	4	2
EPBBC200302U	0.15R	0.3	0.3	2	50	4	2
EPBBC200303U	0.15R	0.3	0.3	3	50	4	2
EPBBC200401U	0.20R	0.4	0.4	1	50	4	2
EPBBC200402U	0.20R	0.4	0.4	2	50	4	2
EPBBC200403U	0.20R	0.4	0.4	3	50	4	2
EPBBC200404U	0.20R	0.4	0.4	4	50	4	2
EPBBC200405U	0.20R	0.4	0.4	5	50	4	2
EPBBC200406U	0.20R	0.4	0.4	6	50	4	2
EPBBC200408U	0.20R	0.4	0.4	8	50	4	2
EPBBC200501U	0.25R	0.5	0.5	1	50	4	2
EPBBC200502U	0.25R	0.5	0.5	2	50	4	2
EPBBC200503U	0.25R	0.5	0.5	3	50	4	2
EPBBC200504U	0.25R	0.5	0.5	4	50	4	2
EPBBC200505U	0.25R	0.5	0.5	5	50	4	2
EPBBC200506U	0.25R	0.5	0.5	6	50	4	2
EPBBC200508U	0.25R	0.5	0.5	8	50	4	2
EPBBC200510U	0.25R	0.5	0.5	10	50	4	2
EPBBC200601U	0.30R	0.6	0.6	1	50	4	2
EPBBC200602U	0.30R	0.6	0.6	2	50	4	2
EPBBC200603U	0.30R	0.6	0.6	3	50	4	2
EPBBC200604U	0.30R	0.6	0.6	4	50	4	2
EPBBC200605U	0.30R	0.6	0.6	5	50	4	2
EPBBC200606U	0.30R	0.6	0.6	6	50	4	2
EPBBC200608U	0.30R	0.6	0.6	8	50	4	2
EPBBC200610U	0.30R	0.6	0.6	10	50	4	2
EPBBC200612U	0.30R	0.6	0.6	12	50	4	2



Cutting conditions : A204

d	R Tolerance
∅	± 0.02

## CARBIDE ENDMILLS - Long Neck Ball Nose Type - 2F

- UNICO Coating provides superior wear resistance and reduces the coefficient of friction.
- Suitable for HRC 30 to HRC 55 Ordinary Steel, Alloy Steel, Cast Iron, Heat-Resistant Steel, Copper, FRP, etc.
- Reduce vibration and more toughness.
- It provides an excellent surface due to better surface grindings.
- Long neck design is suitable for rid cutting.

### EPBBC2 EPBRC2

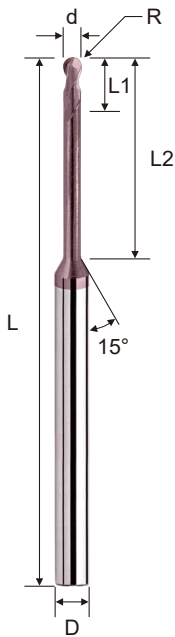

Order No.	Radius (R)	Dia. (d)	CL (L1)	EFF-L (L2)	OAL (L)	Shank (D)	Flutes (F)
EPBBC200702U	0.35R	0.7	0.7	2	50	4	2
EPBBC200704U	0.35R	0.7	0.7	4	50	4	2
EPBBC200708U	0.35R	0.7	0.7	8	50	4	2
EPBBC200710U	0.35R	0.7	0.7	10	50	4	2
EPBBC200712U	0.35R	0.7	0.7	12	50	4	2
EPBBC200802U	0.40R	0.8	0.8	2	50	4	2
EPBBC200804U	0.40R	0.8	0.8	4	50	4	2
EPBBC200806U	0.40R	0.8	0.8	6	50	4	2
EPBBC200808U	0.40R	0.8	0.8	8	50	4	2
EPBBC200810U	0.40R	0.8	0.8	10	50	4	2
EPBBC200812U	0.40R	0.8	0.8	12	50	4	2
EPBBC200904U	0.45R	0.9	0.9	4	50	4	2
EPBBC201002U	0.50R	1.0	1.0	2	50	4	2
EPBBC201003U	0.50R	1.0	1.0	3	50	4	2
EPBBC201004U	0.50R	1.0	1.0	4	50	4	2
EPBBC201005U	0.50R	1.0	1.0	5	50	4	2
EPBBC201006U	0.50R	1.0	1.0	6	50	4	2
EPBBC201008U	0.50R	1.0	1.0	8	50	4	2
EPBBC201010U	0.50R	1.0	1.0	10	50	4	2
EPBBC201012U	0.50R	1.0	1.0	12	50	4	2
EPBBC201014U	0.50R	1.0	1.0	14	50	4	2
EPBBC201016U	0.50R	1.0	1.0	16	50	4	2
EPBBC201018U	0.50R	1.0	1.0	18	50	4	2
EPBBC201020U	0.50R	1.0	1.0	20	50	4	2
EPBBC201022U	0.50R	1.0	1.0	22	60	4	2
EPBRC201004U	0.50R	1.0	1.0	4	50	6	2
EPBRC201006U	0.50R	1.0	1.0	6	50	6	2
EPBRC201008U	0.50R	1.0	1.0	8	50	6	2
EPBRC201010U	0.50R	1.0	1.0	10	50	6	2
EPBRC201212U	0.50R	1.0	1.0	12	50	6	2



Cutting conditions : A204

d	R Tolerance
∅	± 0.02

## CARBIDE ENDMILLS - Long Neck Ball Nose Type - 2F

- UNICO Coating provides superior wear resistance and reduces the coefficient of friction.
- Suitable for HRC 30 to HRC 55 Ordinary Steel, Alloy Steel, Cast Iron, Heat-Resistant Steel, Copper, FRP, etc.
- Reduce vibration and more toughness.
- It provides an excellent surface due to better surface grindings.
- Long neck design is suitable for rid cutting.

### EPBBC2 EPBRC2

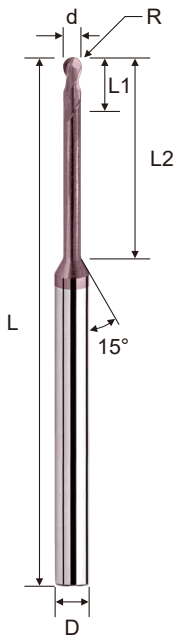

Order No.	Radius (R)	Dia. (d)	CL (L1)	EFF-L (L2)	OAL (L)	Shank (D)	Flutes (F)
EPBBC201204U	0.60R	1.2	1.2	4	50	4	2
EPBBC201206U	0.60R	1.2	1.2	6	50	4	2
EPBBC201208U	0.60R	1.2	1.2	8	50	4	2
EPBBC201210U	0.60R	1.2	1.2	10	50	4	2
EPBBC201212U	0.60R	1.2	1.2	12	50	4	2
EPBBC201216U	0.60R	1.2	1.2	16	50	4	2
EPBBC201220U	0.60R	1.2	1.2	20	50	4	2
EPBBC201224U	0.60R	1.2	1.2	24	60	4	2
EPBBC201406U	0.70R	1.4	1.4	6	50	4	2
EPBBC201408U	0.70R	1.4	1.4	8	50	4	2
EPBBC201412U	0.70R	1.4	1.4	12	50	4	2
EPBBC201416U	0.70R	1.4	1.4	16	50	4	2
EPBBC201503U	0.75R	1.5	1.5	3	50	4	2
EPBBC201504U	0.75R	1.5	1.5	4	50	4	2
EPBBC201506U	0.75R	1.5	1.5	6	50	4	2
EPBBC201508U	0.75R	1.5	1.5	8	50	4	2
EPBBC201510U	0.75R	1.5	1.5	10	50	4	2
EPBBC201512U	0.75R	1.5	1.5	12	50	4	2
EPBBC201514U	0.75R	1.5	1.5	14	50	4	2
EPBBC201516U	0.75R	1.5	1.5	16	50	4	2
EPBBC201518U	0.75R	1.5	1.5	18	50	4	2
EPBBC201520U	0.75R	1.5	1.5	20	50	4	2
EPBBC201522U	0.75R	1.5	1.5	22	60	4	2
EPBBC201525U	0.75R	1.5	1.5	25	60	4	2
EPBBC201530U	0.75R	1.5	1.5	30	60	4	2
EPBRC201506U	0.75R	1.5	1.5	6	50	6	2
EPBRC201508U	0.75R	1.5	1.5	8	50	6	2
EPBRC201510U	0.75R	1.5	1.5	10	50	6	2
EPBRC201512U	0.75R	1.5	1.5	12	50	6	2



Cutting conditions : A204

d	R Tolerance
∅	± 0.02

## CARBIDE ENDMILLS - Long Neck Ball Nose Type - 2F

- UNICO Coating provides superior wear resistance and reduces the coefficient of friction.
- Suitable for HRC 30 to HRC 55 Ordinary Steel, Alloy Steel, Cast Iron, Heat-Resistant Steel, Copper, FRP, etc.
- Reduce vibration and more toughness.
- It provides an excellent surface due to better surface grindings.
- Long neck design is suitable for rid cutting.

### EPBBC2 EPBRC2

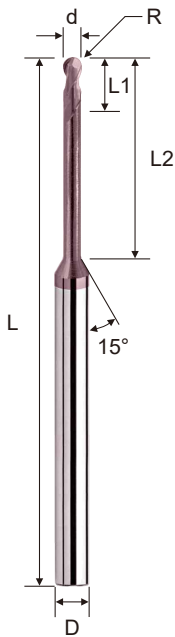

Order No.	Radius (R)	Dia. (d)	CL (L1)	EFF-L (L2)	OAL (L)	Shank (D)	Flutes (F)
EPBBC201606U	0.80R	1.6	1.6	6	50	4	2
EPBBC201608U	0.80R	1.6	1.6	8	50	4	2
EPBBC201612U	0.80R	1.6	1.6	12	50	4	2
EPBBC201616U	0.80R	1.6	1.6	16	50	4	2
EPBBC201620U	0.80R	1.6	1.6	20	50	4	2
EPBBC201806U	0.90R	1.8	1.8	6	50	4	2
EPBBC201808U	0.90R	1.8	1.8	8	50	4	2
EPBBC201812U	0.90R	1.8	1.8	12	50	4	2
EPBBC201816U	0.90R	1.8	1.8	16	50	4	2
EPBBC201820U	0.90R	1.8	1.8	20	50	4	2
EPBBC202004U	1.00R	2.0	2.0	4	50	4	2
EPBBC202006U	1.00R	2.0	2.0	6	50	4	2
EPBBC202008U	1.00R	2.0	2.0	8	50	4	2
EPBBC202010U	1.00R	2.0	2.0	10	50	4	2
EPBBC202012U	1.00R	2.0	2.0	12	50	4	2
EPBBC202014U	1.00R	2.0	2.0	14	50	4	2
EPBBC202016U	1.00R	2.0	2.0	16	50	4	2
EPBBC202018U	1.00R	2.0	2.0	18	50	4	2
EPBBC202020U	1.00R	2.0	2.0	20	50	4	2
EPBBC202022U	1.00R	2.0	2.0	22	60	4	2
EPBBC202025U	1.00R	2.0	2.0	25	60	4	2
EPBRC202006U	1.00R	2.0	2.0	6	50	6	2
EPBRC202008U	1.00R	2.0	2.0	8	50	6	2
EPBRC202010U	1.00R	2.0	2.0	10	50	6	2
EPBRC202016U	1.00R	2.0	2.0	16	50	6	2



Cutting conditions : A204

d	R Tolerance
∅	± 0.02

## CARBIDE ENDMILLS - Long Neck Ball Nose Type - 2F

- UNICO Coating provides superior wear resistance and reduces the coefficient of friction.
- Suitable for HRC 30 to HRC 55 Ordinary Steel, Alloy Steel, Cast Iron, Heat-Resistant Steel, Copper, FRP, etc.
- Reduce vibration and more toughness.
- It provides an excellent surface due to better surface grindings.
- Long neck design is suitable for rid cutting.

### EPBBC2 EPBRC2

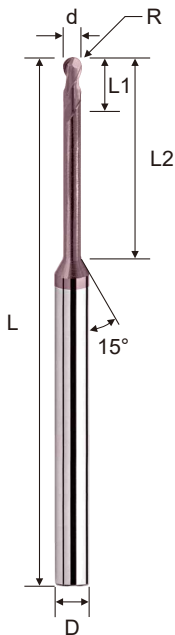

Order No.	Radius (R)	Dia. (d)	CL (L1)	EFF-L (L2)	OAL (L)	Shank (D)	Flutes (F)
EPBBC202508U	1.25R	2.5	2.5	8	50	4	2
EPBBC202510U	1.25R	2.5	2.5	10	50	4	2
EPBBC202516U	1.25R	2.5	2.5	16	50	4	2
EPBBC202520U	1.25R	2.5	2.5	20	60	4	2
EPBBC202525U	1.25R	2.5	2.5	25	60	4	2
EPBBC202530U	1.25R	2.5	2.5	30	60	4	2
EPBRC202506U	1.25R	2.5	2.5	6	50	6	2
EPBRC202510U	1.25R	2.5	2.5	10	50	6	2
EPBRC203006U	1.50R	3.0	3.0	6	50	6	2
EPBRC203008U	1.50R	3.0	3.0	8	50	6	2
EPBRC203012U	1.50R	3.0	3.0	12	50	6	2
EPBRC203016U	1.50R	3.0	3.0	16	60	6	2
EPBRC203020U	1.50R	3.0	3.0	20	60	6	2
EPBRC203025U	1.50R	3.0	3.0	25	60	6	2
EPBRC203030U	1.50R	3.0	3.0	30	60	6	2
EPBRC203035U	1.50R	3.0	3.0	35	75	6	2
EPBRC204008U	2.00R	4.0	4.0	8	50	6	2
EPBRC204010U	2.00R	4.0	4.0	10	50	6	2
EPBRC204012U	2.00R	4.0	4.0	12	50	6	2
EPBRC204016U	2.00R	4.0	4.0	16	60	6	2
EPBRC204020U	2.00R	4.0	4.0	20	60	6	2
EPBRC204025U	2.00R	4.0	4.0	25	60	6	2
EPBRC204030U	2.00R	4.0	4.0	30	60	6	2
EPBRC204035U	2.00R	4.0	4.0	35	75	6	2
EPBRC205015U	2.50R	5.0	5.0	15	60	6	2
EPBRC205020U	2.50R	5.0	5.0	20	60	6	2
EPBRC205025U	2.50R	5.0	5.0	25	60	6	2
EPBRC205030U	2.50R	5.0	5.0	30	75	6	2
EPBRC206015U	3.00R	6.0	10.0	15	50	6	2
EPBRC208025U	4.00R	8.0	12.0	25	60	8	2
EPBRC210030U	5.00R	10.0	16.0	30	75	10	2
EPBRC212030U	6.00R	12.0	18.0	30	75	12	2

Cutting conditions : A204

d	R Tolerance
∅	± 0.02